


TTBS CERTIFIED SHEETS - MILL FINISH
AVAILABLE IN A VARIETY OF PROFILES




CORRUGATED


PANEL PROFILE

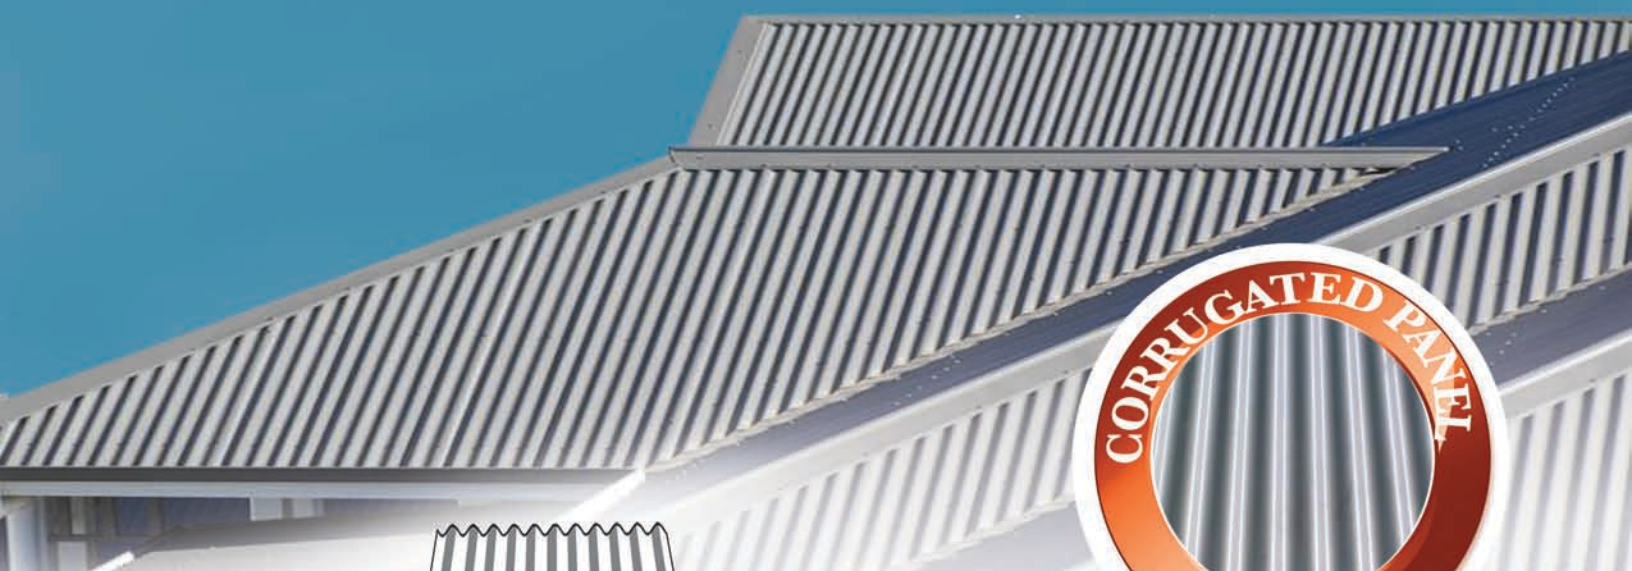

STEREO VIEW

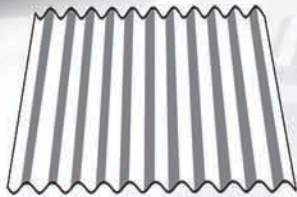


PANEL SECTION

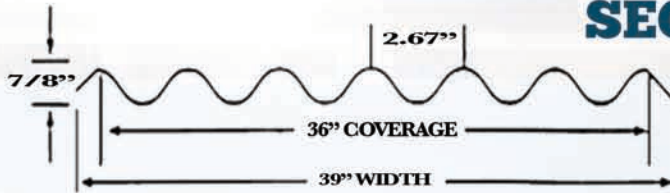


Base Metal	ZINCALUME ASTM 792M
Tensile Strength	50000 PSI
Aluzinc Coating	ALUZINC Az150 Gms/sq meter
Paint Coat	Pretreatment: Corrosion Resistance - SMP Polyester, PVF2, Kynar 500
Primer Top & Reverse	25% Gloss 20µ over 5µ Primer
	Reverse 10µ over 5µ Primer - According to AAMA - 605 Specification
Fastening System	2" steel/wood 12-14 self drilling screws with neoprene washer
	Tolerance on stated Values +/- 1%


MATERIAL Specifications	CORRUGATED Panel			
	MM		INCH	
Panel Width	990.6	39		
Panel Coverage	914.4	36		
Min Pitch	5°	1:12		
Thickness	Weight		Purlin Spacing	
Wire Gauge	Lb/Ft	Kg/M	MM	Inch
24 Ga .60MM	3.73	5.56	1828.8	72
26 Ga .50MM	3.02	4.5	914.4	36
28 Ga .40MM	2.4	3.57	609.6	24




RIDGE CAP/HIP CAP - 16"




DRIP EDGE FLASHING - 6"

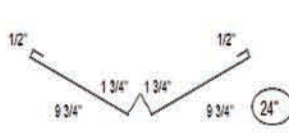


VALLEY GUTTER FLASHING - 24"



GABLE END COVERS - 12"



FASCIA FLASHING - 16"



APRON WALL FLASHING - 12"

ROOF PROFILE

TBS CERTIFIED SHEETS - MILL FINISH
AVAILABLE IN A VARIETY OF PROFILES



COLOURS AVAILABLE

*Actual colours may vary slightly



GUN METAL



CHARCOAL
GRAY



COASTAL
BLUE



DEEP
OCEAN



TEAL



BLUE RIDGE



CARAMEL
BROWN



COPPER



HEADLAND
RED



TERRA
COTTA



PIMENTO
RED



MANOR
RED



COTTAGE
GREEN



WILDERNESS



GALVALUME
(unpainted)



SEA FOG



ALASKA
GRAY



FOUNTAIN
BLUE

CORRUGATED PANEL PROFILE



The Corrugated Panel is the most practical and efficient panel for the tropics, allowing the rainwater to flow beautiful in its continuous circular wave.

The panel is clean and beautiful and provides maximum coverage and its simple and easy to install.

Benefits:

- Economical
- Can be installed over existing roofing materials.
- Applies over open framing or solid substrate.
- Corrosion Protectant.